


SC-32T

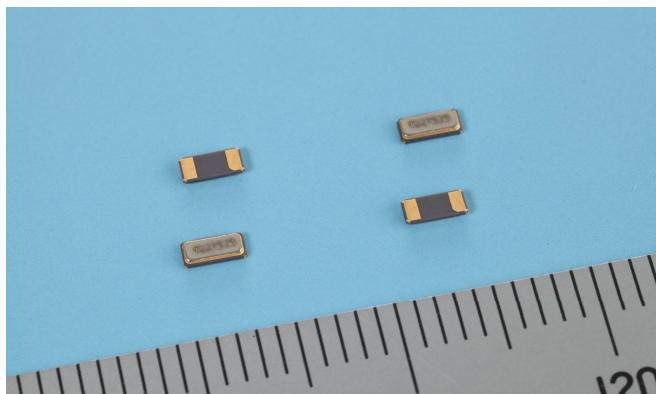

Features

- Ultra thin type (0.60mm max)
- Suitable for high density surface mounting
- Excellent shock and heat resistance
- Complete Pb-free
- A crystal resonator processed by high reliable photolithographic technology inside.

Applications


Cellular Phones, PHS, Tablet PC, DSC, Car Audio
GPS Module, FM Tuner Module, Mobile Device
Sub-clock function for a variety of Micro-
Controllers

Standard Specifications


Conditions where not specified (Temperature: 25±2°C, DL:0.1μW)

Item	Symbol	Specifications	Conditions Note
Nominal Frequency	f_nom	32.768kHz	
Frequency Tolerance	f_tol	-6	
Turnover Temperature	Ti	+25±5°C	
Parabolic Coefficient	B	$(-0.03 \pm 10\%) \times 10^{-6}/^{\circ}\text{C}^2$	
Load Capacitance	CL	6pF, 7pF, 9pF, 12.5pF	
Motional Resistance (ESR)	R1	70kΩ Max.	
Absolute Max. Drive Level	DI _{max.}	1.0μW Max.	
Drive Level	DL	0.1μW typ.	
Shunt Capacitance	C0	1.0pF typ.	
Frequency Ageing	f_age	$\pm 3 \times 10^{-6}/\text{year}$	+25±3°C, First Year
Operating Temperature	T_use	-40~+85°C	
Storage Temperature	T_stg	-55~+125°C	Piece part basis


Dimensions

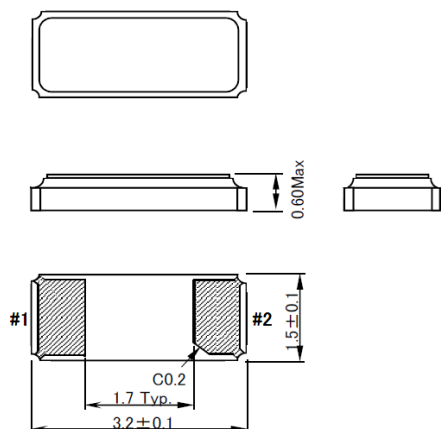

Internal Lead Connections

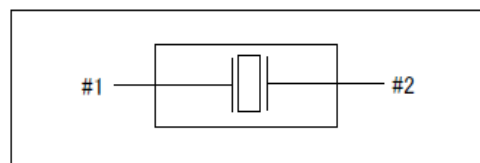

Recommended Soldering Pattern

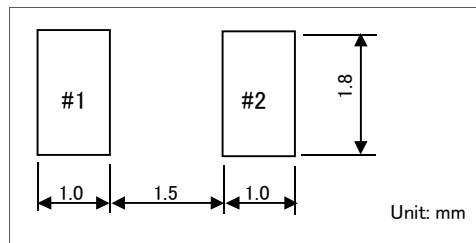

Remark: Please make sure that there is no pattern under SC-32T on the circuit board.

SHENZHEN YIJIN ELECTRONICS CO: LTD TEL: 0755-27876565

18924600166 QQ: 857950243 <http://www.vc-tcxo.com>