


● FEATURES



- LOW COST
- BUILT-IN CAPACITORS

● SPECIFICATIONS

FREQUENCY	1.80-6.00 MHz	6.01-13.00 MHz	13.01-50.00 MHz
DIMENSIONS	FIGURE 1	FIGURE 2	
FREQUENCY TOLERANCE	±0.5% MAX		
RESONANT IMPEDANCE	30 OHMS MAX	25 OHMS MAX	30 OHMS MAX
FREQUENCY STABILITY OVER TEMPERATURE	±0.3% MAX		
OPERATING TEMPERATURE RANGE	-20°C TO +80°C		
ISOLATION RESISTANCE	100 M OHM MIN		
FREQUENCY AGING (10 YEARS)	±0.3% MAX		
WITHSTANDING VOLTAGE	100 VDC, 5 sec. MAX		
BUILT-IN CAPACITANCE	30 pF ±20% MAX		
MAX VOLTAGE	6 VDC, 15Vp-p AC		
STORAGE TEMPERATURE RANGE	35°C TO +85°C		

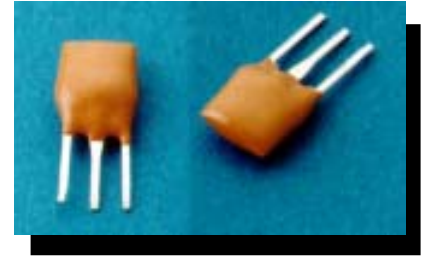

● OUTLINE DRAWINGS

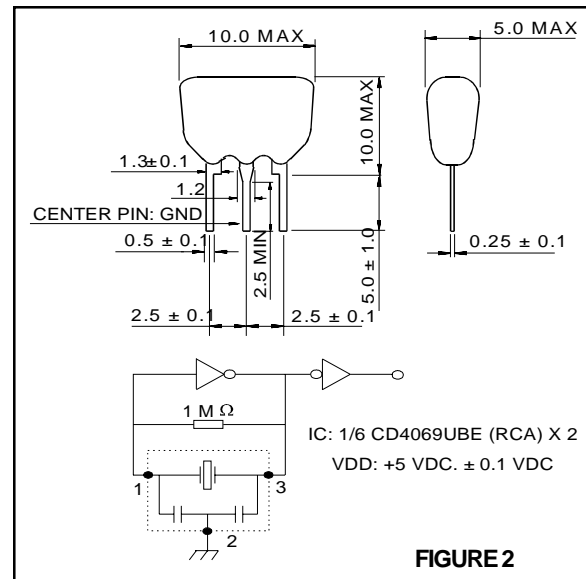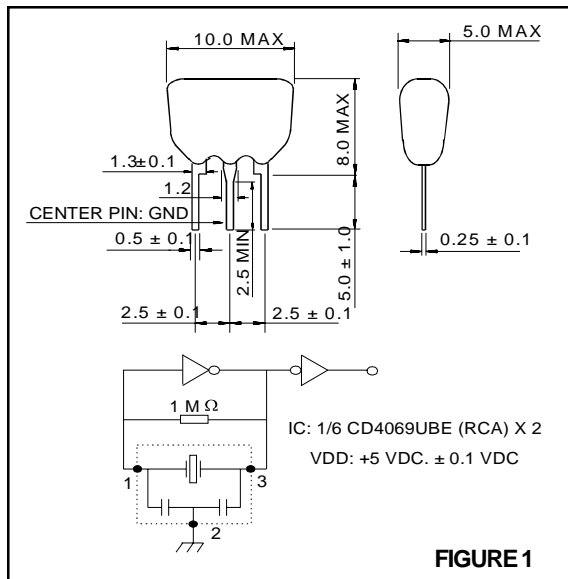

● PART NUMBERING SYSTEM

SERIES	-	FREQUENCY
POC		IN MHz

EXAMPLE: POC - 5.00

SHENZHEN YIJIN ELECTRONICS CO: LTD TEL: 0755-27876565

18924600166 QQ: 857950243 <http://www.vc-tcxo.com>