


# CSTCR4M00G15L99-R0

目前生产

RoHS

REACH

## 外观 & 形状

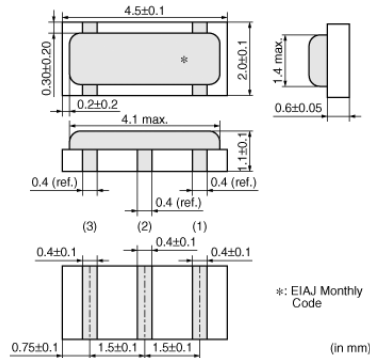

## 特点

MURATA's frequency adjustment and packaging technology expertise has enabled the development of the chip CERALOCK(R) with built-in load capacitors. High-density mounting is made possible by the small package and the elimination of the need for an external load capacitor.

### Features

1. Oscillation circuits do not require external load capacitors.
2. Available in a wide frequency range.
3. Extremely small and have a low profile.
4. No adjustment is necessary for oscillation circuits.

## 用途

其他用途	消费级/工业级
------	---------

## 包装信息

包装	规格	最小订购单位
-R0	180mm压纹带	3000

# CSTCR4M00G15L99-R0

## 规格

形状	SMD
频率	4.000MHz
频率公差	±0.1%
工作温度范围	0°C to 70°C
频率温度特性	±0.08%
频率老化	±0.07%
清洗	Not available
谐振阻抗	60Ω
内置负载电容	39pF