


# XRCHH52M000F1QA2P0

目前生产

RoHS

REACH

## 外观&形状

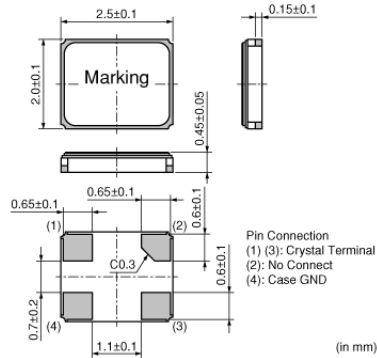

## 特点

With unique metal sealing technology, this product realizes an excellent frequency stability over temperature and small size package. They are suitable for various types of digital communication equipment.

## 用途

其他用途 工业级

## 包装信息

包装	规格	最小订购单位
P0	180mm塑料编带	3000

# XRCHH52M000F1QA2P0

## 规格

型号	TAS-2520F
频率	52.0000MHz
频率公差	±10ppm max. (25±3°C)
工作温度范围	-30°C to 85°C
频率温度特性	±15ppm max.
频率老化	±1ppm max./year(±3ppm max./5years)
清洗	Not available
负载电容量	8pF
等效串联电阻(max.)	60Ω
驱动电平(max.)	60μW
形状	SMD