

NP3225SA

Simple Packaged Crystal Oscillator (SPXO)

Main Application


For communication equipment for ISDN, SDH/SONET, WiMAX, etc. and Base-stations

Features

- Differential Output SPXO
- Compact dimension : 3.2 × 2.5 × 0.9 mm
- Supply Voltage : +2.5V or +3.3V
- LVPECL output level
- Excellent low phase jitter (Typ. 0.15ps @156.25MHz)

Pb Free

RoHS Compliant
Directive 2011/65/EU

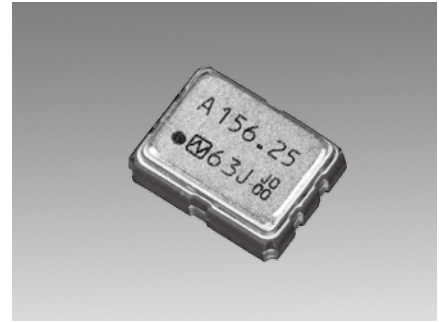


Absolute maximum rating
Supply Voltage (V_{CC}) -0.3 to +4.0 V
Storage Temperature Range -55 to +125 °C

Specifications


Item	Model	NP3225SA	
Output Type		LVPECL	
Nominal Frequency Range (MHz)		100 to 170	
Overall Frequency Tolerance *1		Max. ±50 × 10 ⁻⁶	
Operating Temperature Range (°C)		-40 to +85	
Supply Voltage [V _{CC}] (V)		+2.5 ± 5 %	+3.3 ± 10 %
Current Consumption	Enable (mA)	Max. 60 (STAND-BY=V _{CC} or OPEN, R _L =50Ω)	
	Stand-by (µA)	Max. 15 (STAND-BY=GND)	
Output Voltage (V)		V _{OL} : V _{CC} -1.81 to V _{CC} -1.62 (DC characteristics)	
		V _{OH} : V _{CC} -1.025 to V _{CC} -0.88 (DC characteristics)	
Rise Time / Fall Time (ns)		Max. 1 (20 to 80% Waveform)	
Symmetry (%)		45 to 55 (at 50% Waveform)	
Output Load (Ω)		50 (Terminated to V _{CC} -2.0V)	
Start-up Time (ms)		Max. 10	
Phase Jitter (ps)		Max. 1 (Offset Frequency : 12kHz to 20MHz)	
Specification Number		NSC5080A	NSC5080B

*1 : The frequency stability includes initial frequency tolerance, temperature variation, and supply variation.

Dimensions

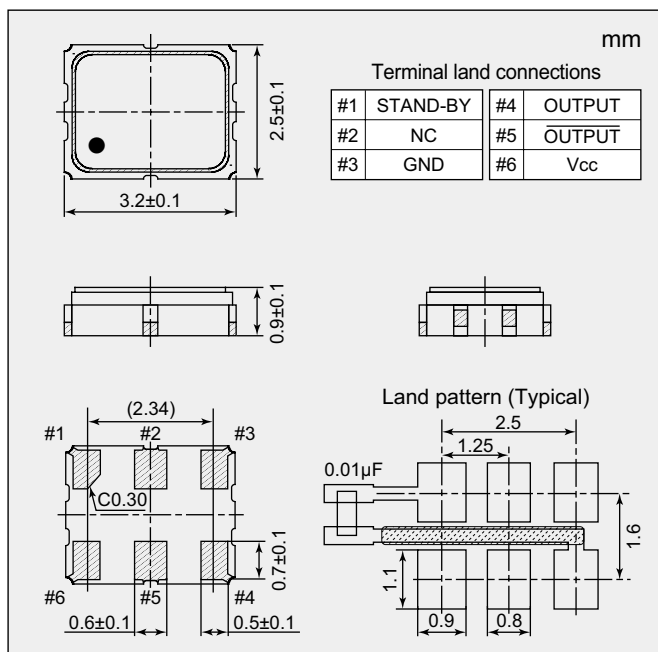

Output waveform

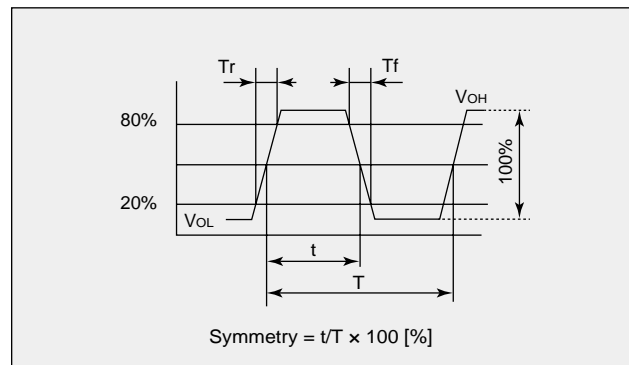

Standby Function Table (Three-state)

#1 Input	#4 and #5 output
Level H (V _{IH} ≥ 0.7 V _{CC}) or OPEN	Oscillation output ON
Level L (V _{IL} ≤ 0.3 V _{CC})	High impedance

Please specify the model name, frequency, and specification number when you order products.

For further questions regarding specifications, please feel free to contact us.

SHENZHEN YIJIN ELECTRONICS CO: LTD TEL: 0755-27876565

18924600166 QQ: 857950243 <http://www.vc-tcxo.com>