


CC8V-T1A

Tuning Fork Crystal 32.768 kHz



DIMENSIONS

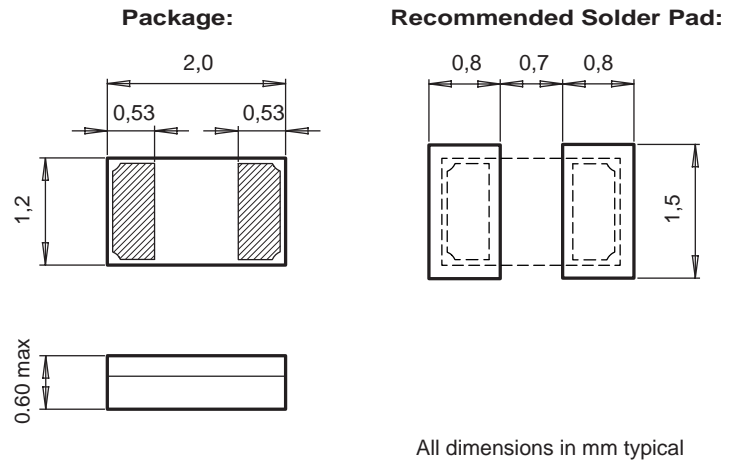

APPLICATIONS

Metering
Industrial
Automotive
Health Care
Medical Implantable

DESCRIPTION

The CC8V-T1A is a low frequency SMT Quartz Crystal Unit that incorporates a tuning fork Quartz Crystal Resonator. It operates under vacuum in a hermetically sealed ceramic package with ceramic lid.

FEATURES

Outstanding hermetic sealing with gold-tin preform.
High stability and low aging guaranteed by hermetic sealing.
Available for extended operating temperature range.
Small size, low profile, lightweight (5.5 mg).
High shock and vibration resistant.
100% Pb-free, RoHS-compliant.

ELECTRICAL CHARACTERISTICS AT 25°C

Standard Frequencies 32.768 kHz / 100.000 kHz ¹⁾	F _L	32.768	kHz
Load capacitance ²⁾	C _L	4.0 / 6.0 / 7.0 / 9.0 / 12.5	pF
Frequency tolerance ³⁾	ΔF/F	±20	ppm
	ΔF/F	±100	ppm
Series resistance typ./max.	R _S	60 / 80	kΩ
Motional capacitance typ.	C ₁	4.0	fF
Static capacitance typ.	C ₀	1.2	pF
Drive level max.	P	0.5	μW
Insulation resistance min.	R _i	500	MΩ
Aging first year max.	ΔF/F	±3	ppm
Turnover temperature	T ₀	25 ±5	°C
Frequency vs. temperature	ΔF/F ₀	-0.035 ppm/°C ² (T - T ₀) ² ±10%	

- 1) Other frequencies on request.
2) Other load capacitances on request.
3) Tighter frequency tolerances on request.

STANDARD FREQUENCIES

Frequencies
32.768 kHz / 100.000 kHz
Other frequencies on request

ENVIRONMENTAL CHARACTERISTICS

		Conditions	Max. Dev.
Storage temp. range		-55 to +125°C	
TA Operating temperature range		-40 to +85°C	
TB Extended oper. temp. range		-40 to +125°C	
TC Extended oper. temp. range		-55 to +125°C	
Shock resistance	ΔF/F	5000 g, 0.3 ms, ½ sine	±5 ppm
Vibration resistance	ΔF/F	20 g / 10–2000 Hz	±5 ppm

TERMINATIONS AND PROCESSING

Type	Termination	Processing
CC8V-T1A	For SMT mounting Au flashed pads	IPC/JEDEC J-STD-020C 260°C / 20 - 40 s
CC8V-T2A	SnPb plated pads available on request	IPC/JEDEC J-STD-020C 260°C / 20 - 40 s

ORDERING INFORMATION

	C C 8 V - T 1 A 32.768 kHz 12.5 pF ±20 ppm TA QC				
<p>Ceramic package —</p> <p>Ceramic lid —</p> <p>Package size — 8 = 2.0 x 1.2 x 0.65 mm</p> <p>Tuning fork —</p> <p>SMT Package —</p> <p>Pads — 1 = Au flashed pads 2 = SnPb plated pads</p> <p>Pads on both ends —</p>	<p>Frequency F_L —</p> <p>Load capacitance C_L — 4.0 pF, 6.0 pF 7.0 pF 9.0 pF 12.5 pF Other C_L on request</p> <p>Frequency tolerance — ±20 ppm ±100 ppm Tighter freq. tolerances on request</p> <p>Temperature range — TA = -40 to +85°C (Standard) TB = -40 to +125°C TC = -55 to +125°C</p> <p>Qualification — QC = Commercial Grade (Standard) QM = Medical Grade</p>				
<p>A unique part number will be generated for each product specification, i.e:</p> <table border="1" style="margin: auto;"> <tr> <td style="width: 20%;">20xxxx-MC01</td> <td style="width: 80%;">1'000 pcs (in 8 mm tape on 7" reel)</td> </tr> <tr> <td>20xxxx-MC03</td> <td>3'000 pcs (in 8 mm tape on 7" reel)</td> </tr> </table>		20xxxx-MC01	1'000 pcs (in 8 mm tape on 7" reel)	20xxxx-MC03	3'000 pcs (in 8 mm tape on 7" reel)
20xxxx-MC01	1'000 pcs (in 8 mm tape on 7" reel)				
20xxxx-MC03	3'000 pcs (in 8 mm tape on 7" reel)				

All specifications subject to change without notice.